



Product datasheet

VELA S

CE  IP67

POWER	OPTIC	COLOR	CRI	INPUT	OUTPUT	LED	CABLE	
4W	20°, 36°	3000K	80	24VDC	300Lm	LUMINUS	H05RN-F 2*0.75mm ²	
4W	20°, 36°	3000K	80	100-240V, 50/60Hz	300Lm	LUMINUS	H05RN-F 3*0.75mm ²	
1*3W	15°	RGB 3IN1	-	24VDC	-	EDISON	H05RN-F 4*0.75mm ²	
1*4W	25°	RGB 4IN1	-	24VDC	-	PROLIGHT	H05RN-F 5*0.75mm ²	

ART.	 CODE	 CODE	RGB 3IN1 CODE	RGB 4IN1 CODE	WEIGHT	BEAR WEIG HT	A	B	C	D	E	F
VELA S ROUND	652319	652419	646614	646218	0.4 KG	1000 KG	Ø65	80	Ø56	125	Ø90	Ø55
VELA S SQUARED	652519	652619	646814	646418	0.4 KG	1000 KG	65	80	Ø56	125	Ø90	Ø55



MATERIAL: Cover AISI 316 / Body Aluminum

FINISHING: Powder Spray Glossy Black (PBL)

UPON REQUEST: Optics 646614, 646814 20°, 25°

DESCRIPTION: Including box / Two installation options: 1. By shrapnel 2. By rubber ring embed

Please consult the instruction manual for detailed installation instructions

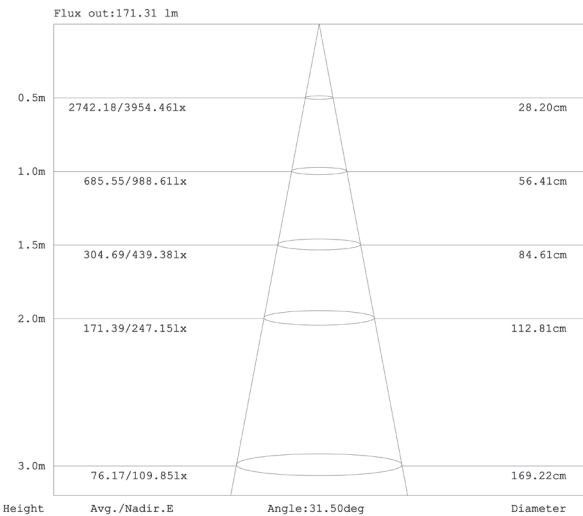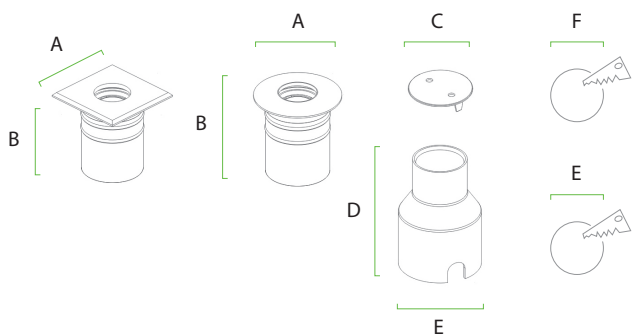

Please consult the instruction manual for detailed installation instructions