



VELA L ROUND



VELA L SQUARED

Product datasheet

VELA L

CE  IP67

POWER	OPTIC	COLOR	CRI	INPUT	OUTPUT	OUTPUT ADJ.	LED	CABLE	
13W	15°	3000K	80	24VDC	1080Lm	1150Lm	LUMINUS	H05RN-F 2*0.75mm ²	
13W	15°	3000K	80	100-240V, 50/60Hz	1080Lm	1150Lm	LUMINUS	H05RN-F 3*0.75mm ²	

ART.	CODE 	CODE 	WEIGHT	BEAR WEIG HT	A	B	C	D	E	F
VELA L ROUND	632012B	632112B	1.3 KG	1100 KG	Ø126	154	Ø117	170	Ø142	Ø145
VELA L SQUARED	632212B	632312B	1.4 KG	1100 KG	126	154	Ø117	170	Ø142	Ø145
VELA L ROUND ADJUSTABLE	634512B	634612B	3 KG	1000 KG	Ø175	210	Ø160	230	Ø200	Ø205
VELA L SQUARED ADJUSTABLE	634712B	634812B	3.1 KG	1000 KG	175	210	Ø160	230	Ø200	Ø205

MATERIAL:

Cover AISI 316L / Body Aluminum

FINISHING:

Powder Spray Glossy Black (PBL)

UPON REQUEST:

Optics 24°, 38°, 52° / Double Outlet Cable

DESCRIPTION:


Including box, embedded box with screws

Please consult the instruction manual for detailed installation instructions




VELA L ROUND ADJ.


VELA L SQUARED ADJ.

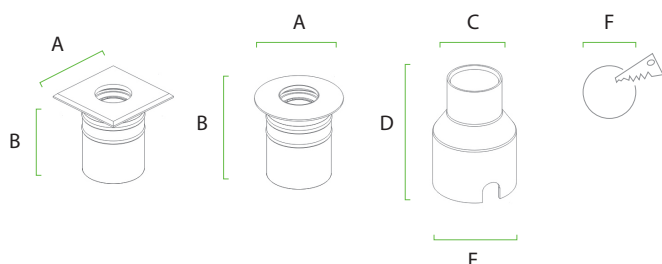

VELA L

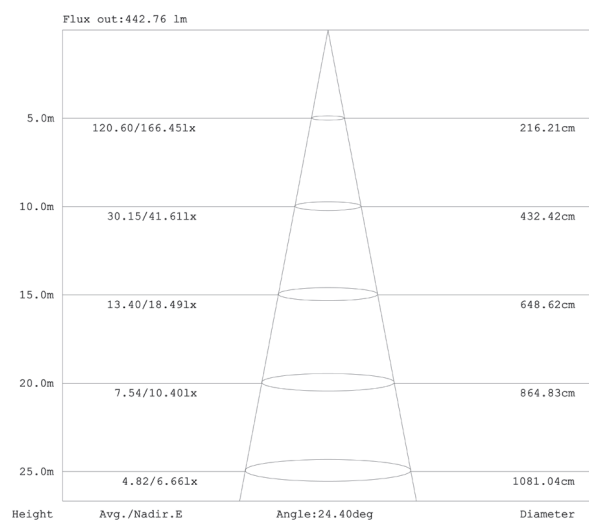

VELA L ADJUSTABLE

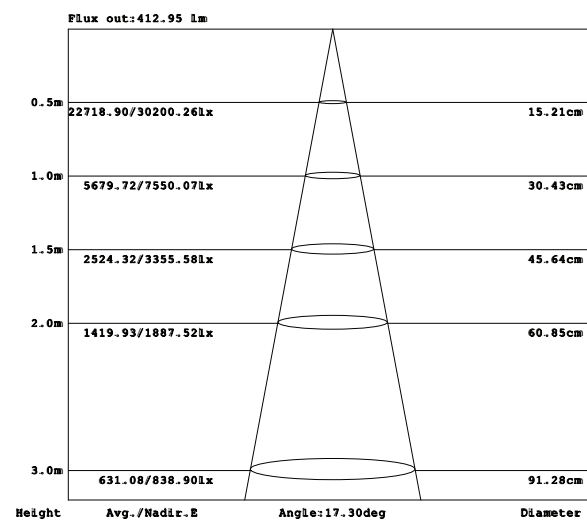

Please consult the instruction manual for detailed installation instructions