



VELA M ROUND



VELA M SQUARED

Product datasheet

VELA M

CE  IP67

POWER	OPTIC	COLOR	CRI	INPUT	OUTPUT	OUTPUT ADJ.	LED	CABLE	
7W	15°, 38°	3000K	80	24VDC	480Lm	550Lm	LUMINUS	H05RN-F 2*0.75mm ²	
7W	15°, 38°	3000K	80	100-240V,50/60Hz	480Lm	550Lm	LUMINUS	H05RN-F 3*0.75mm ²	

ART.	CODE 	CODE 	WEIGHT	BEAR WEIG HT	A	B	C	D	E	F
VELA M ROUND	631012B	631112B	0.75 KG	1200 KG	Ø85	123	Ø81	135	Ø100	Ø105
VELA M SQUARED	631212B	631312B	0.75 KG	1200 KG	85	123	Ø81	135	Ø100	Ø105
VELA M ROUND ADJUSTABLE	633512B	633612B	1.4 KG	1100 KG	Ø126	154	Ø117	170	Ø140	Ø145
VELA M SQUARED ADJUSTABLE	633712B	633812B	1.5 KG	1100 KG	126	154	Ø117	170	Ø140	Ø145

MATERIAL: Cover AISI 316L / Body Aluminum

FINISHING: Powder Spray Glossy Black (PBL)

UPON REQUEST: Optics 25° / Double Outlet Cable

DESCRIPTION: Including box, embedded box with screws


Please consult the instruction manual for detailed installation instructions




VELA M ROUND ADJ.




VELA M SQUARED ADJ.

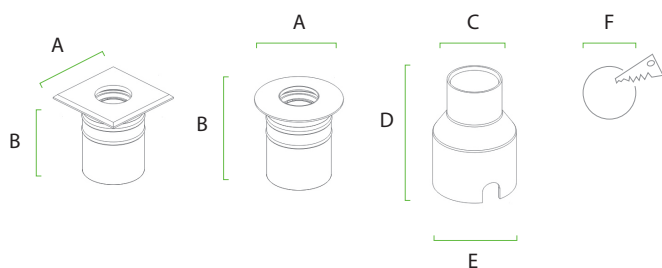

VELA M

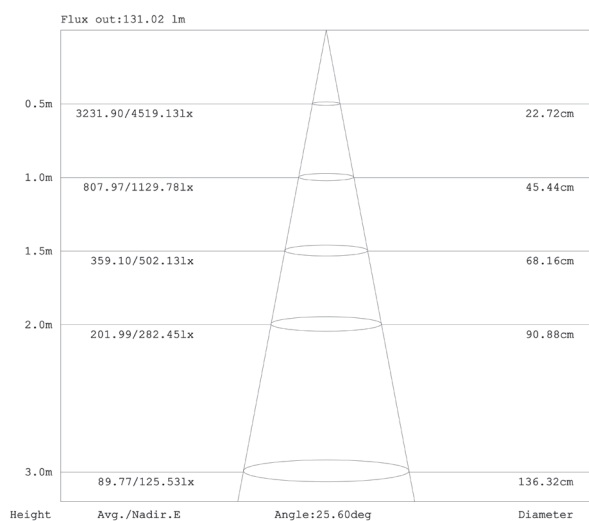

VELA M ADJUSTABLE

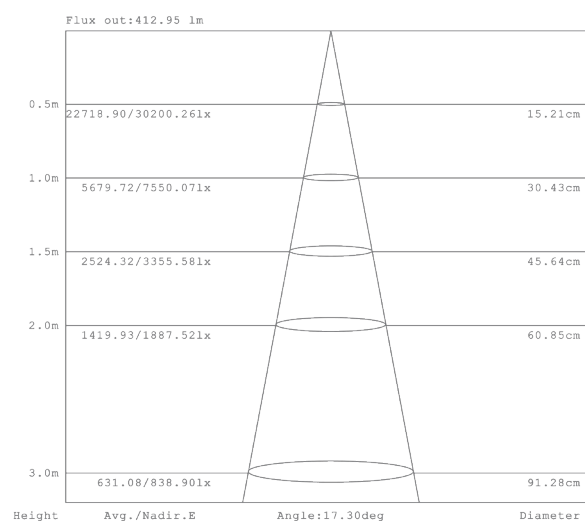

Please consult the instruction manual for detailed installation instructions